

802-002

Y24

FIG. 1A

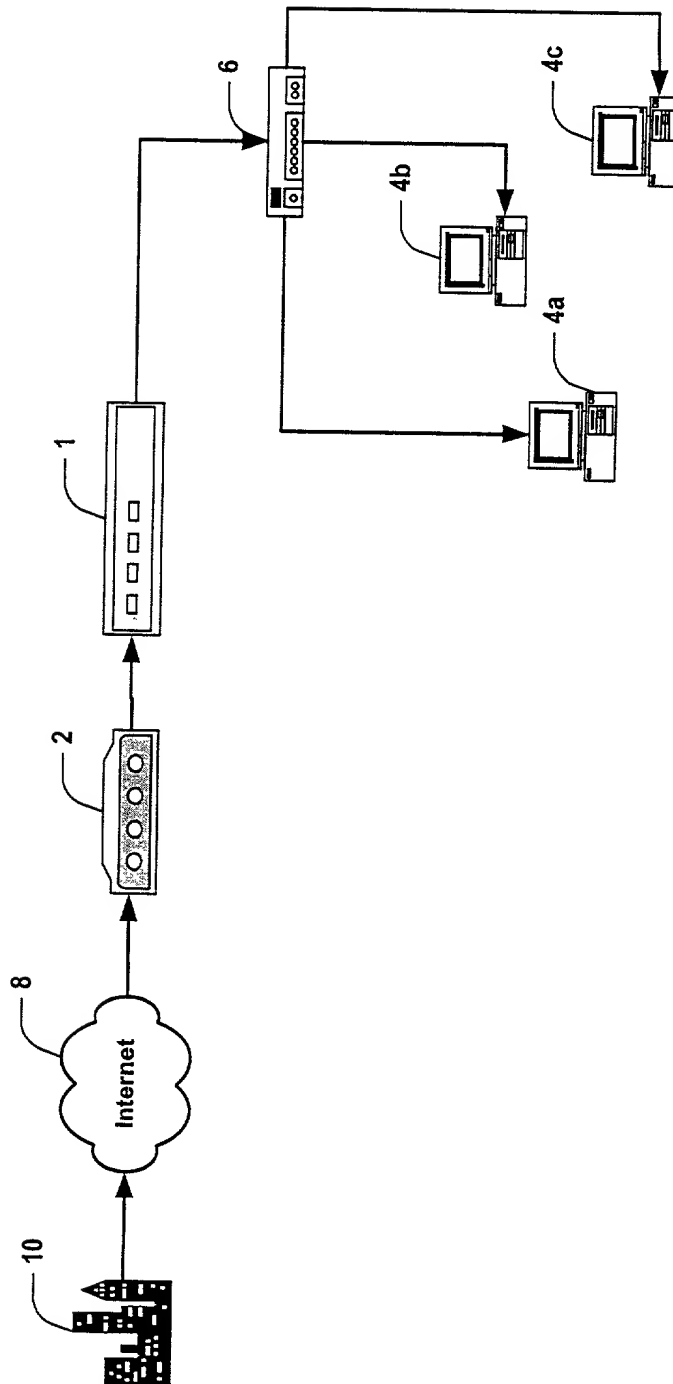
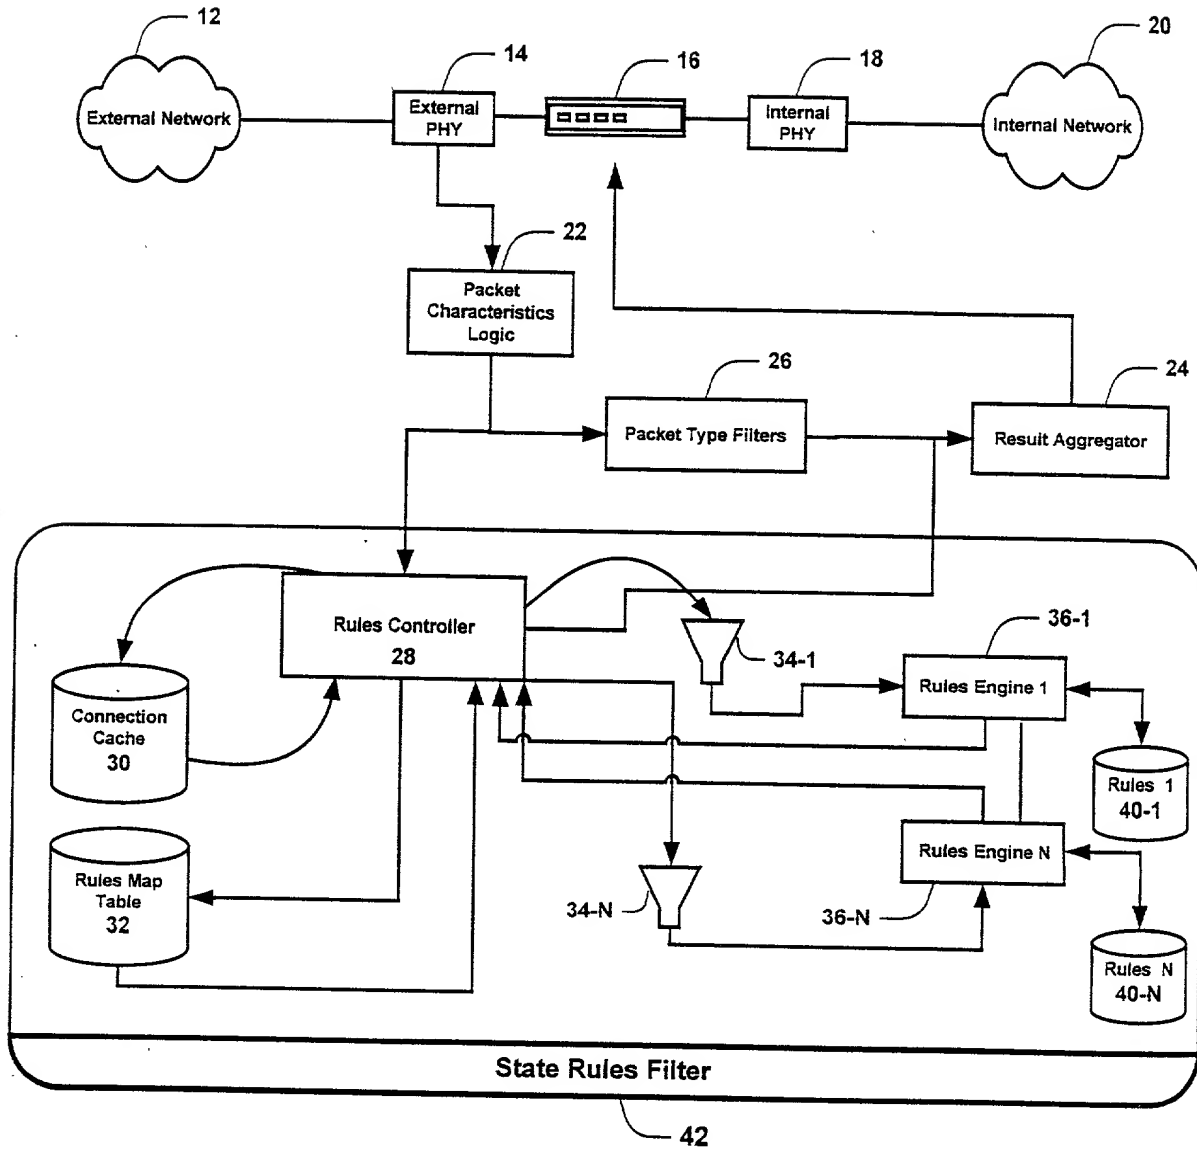


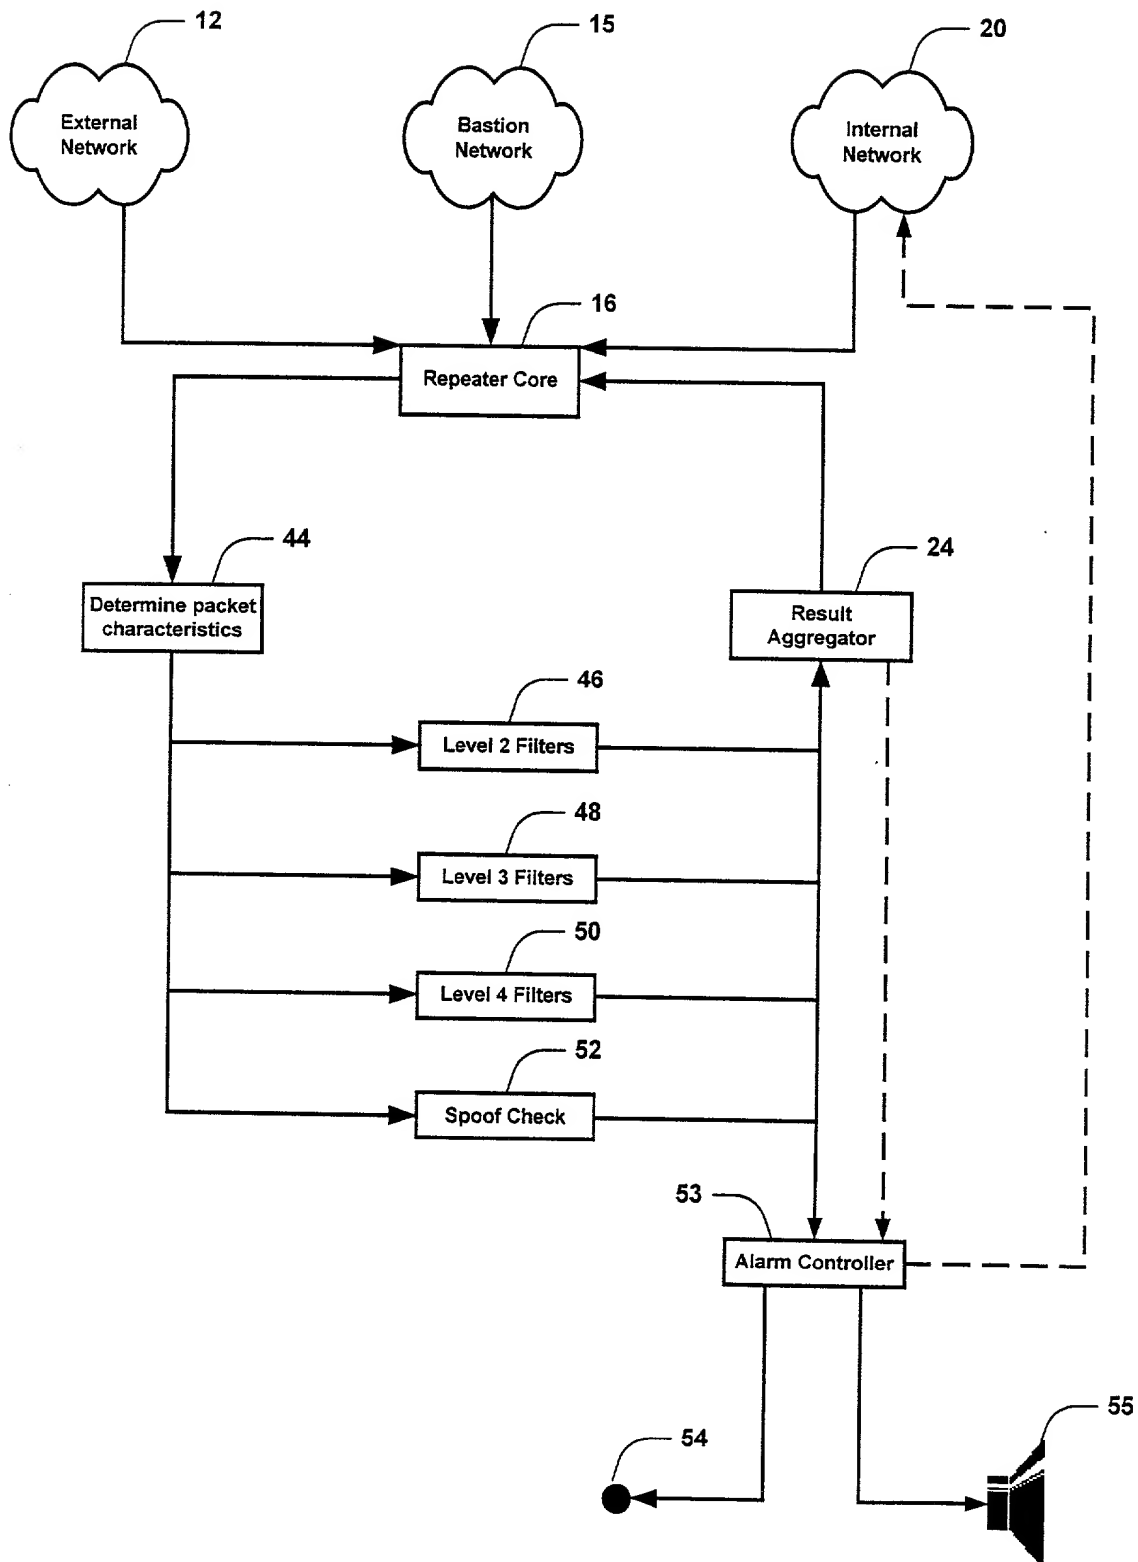


FIG. 2





802-002  
4/24

FIG. 3



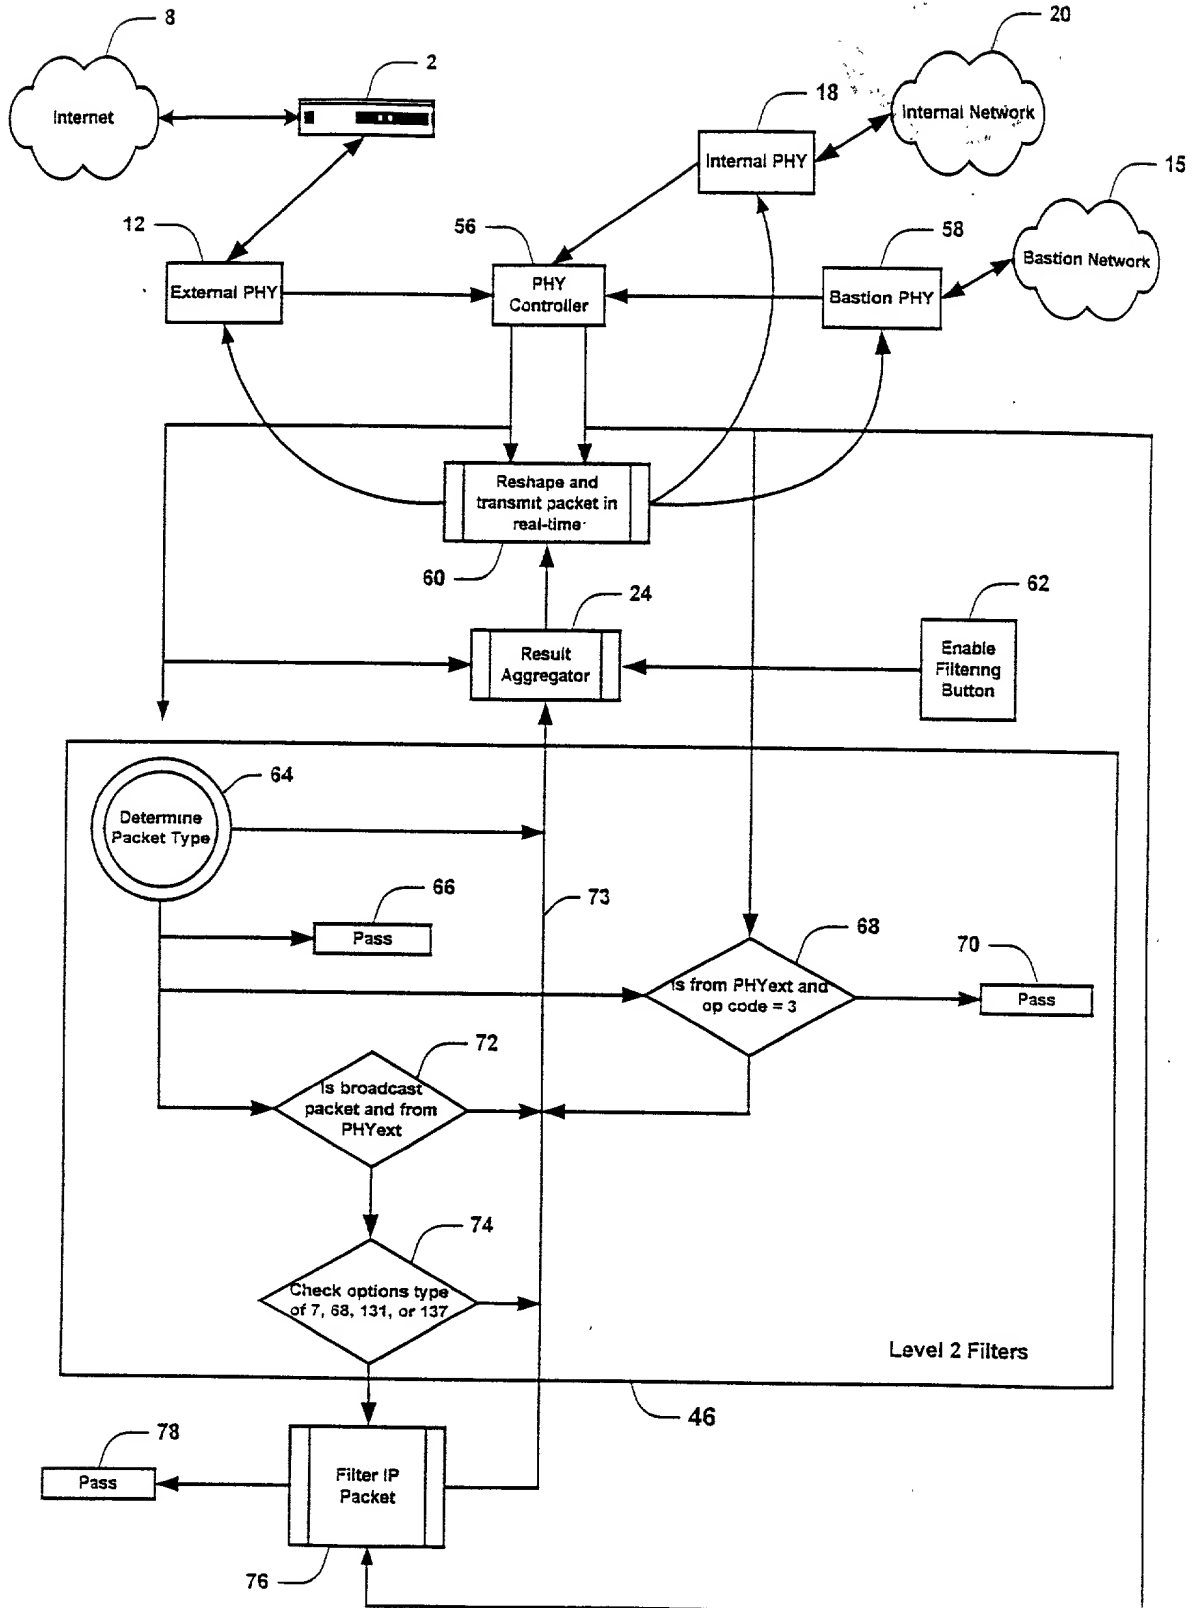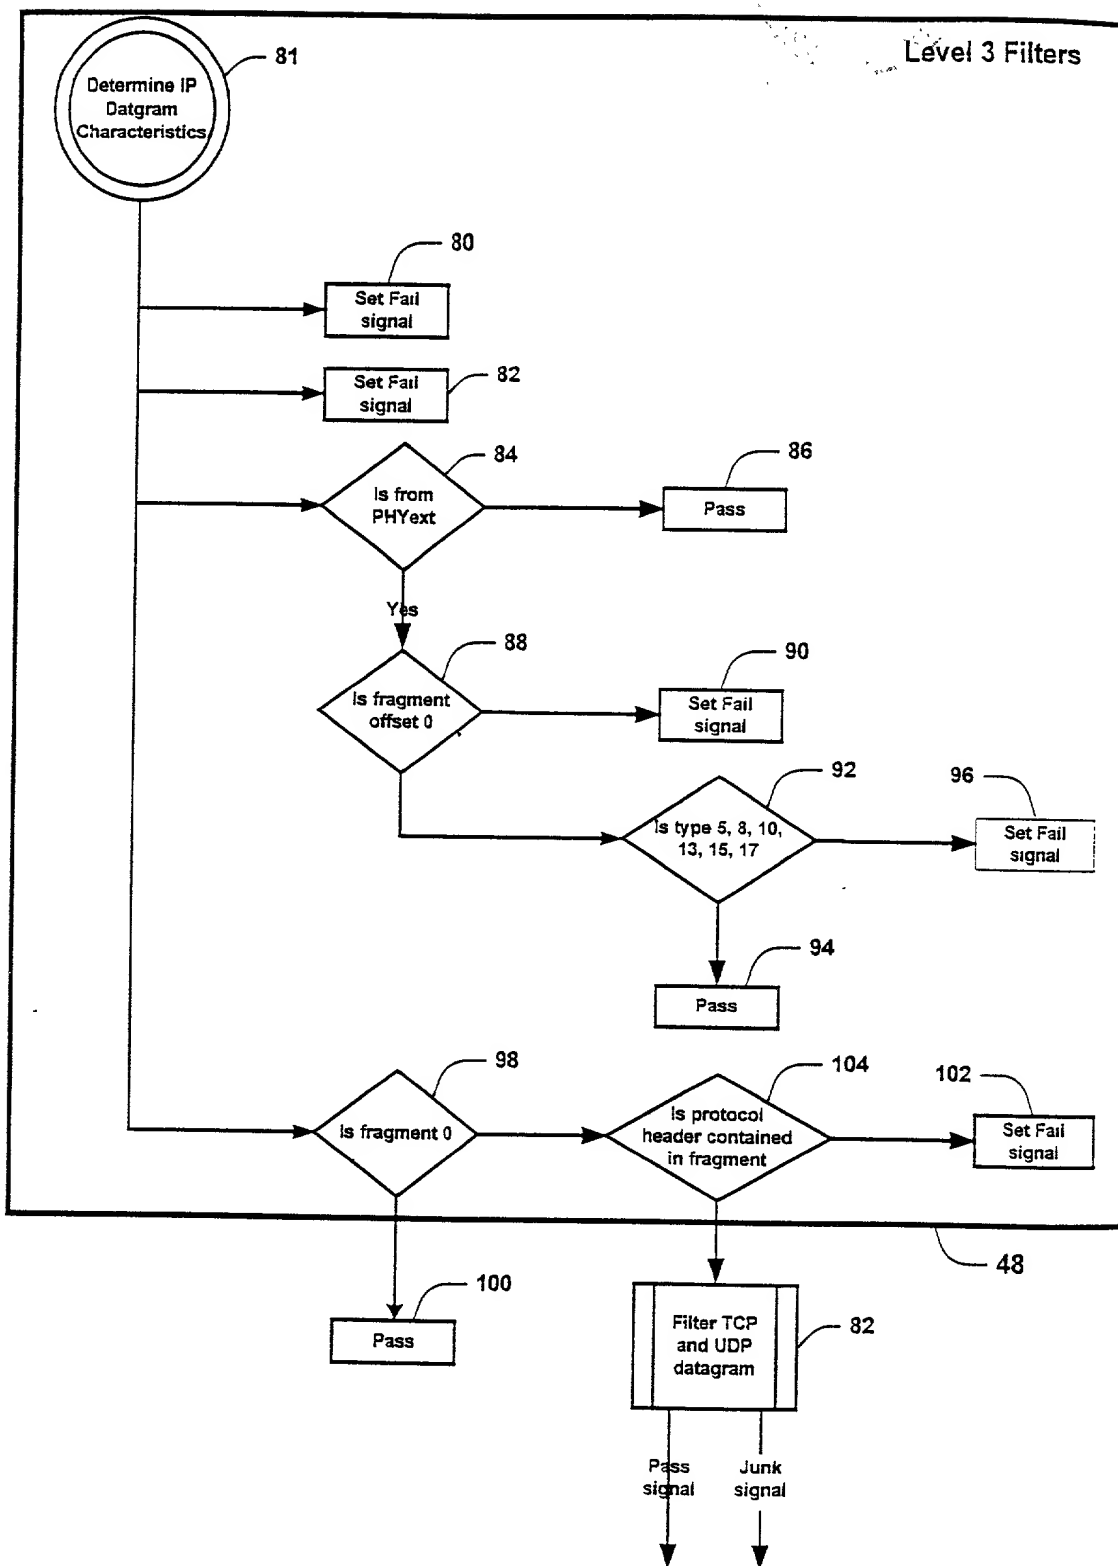
802-002  
5/24  
FIG. 4






802-002  
7/24

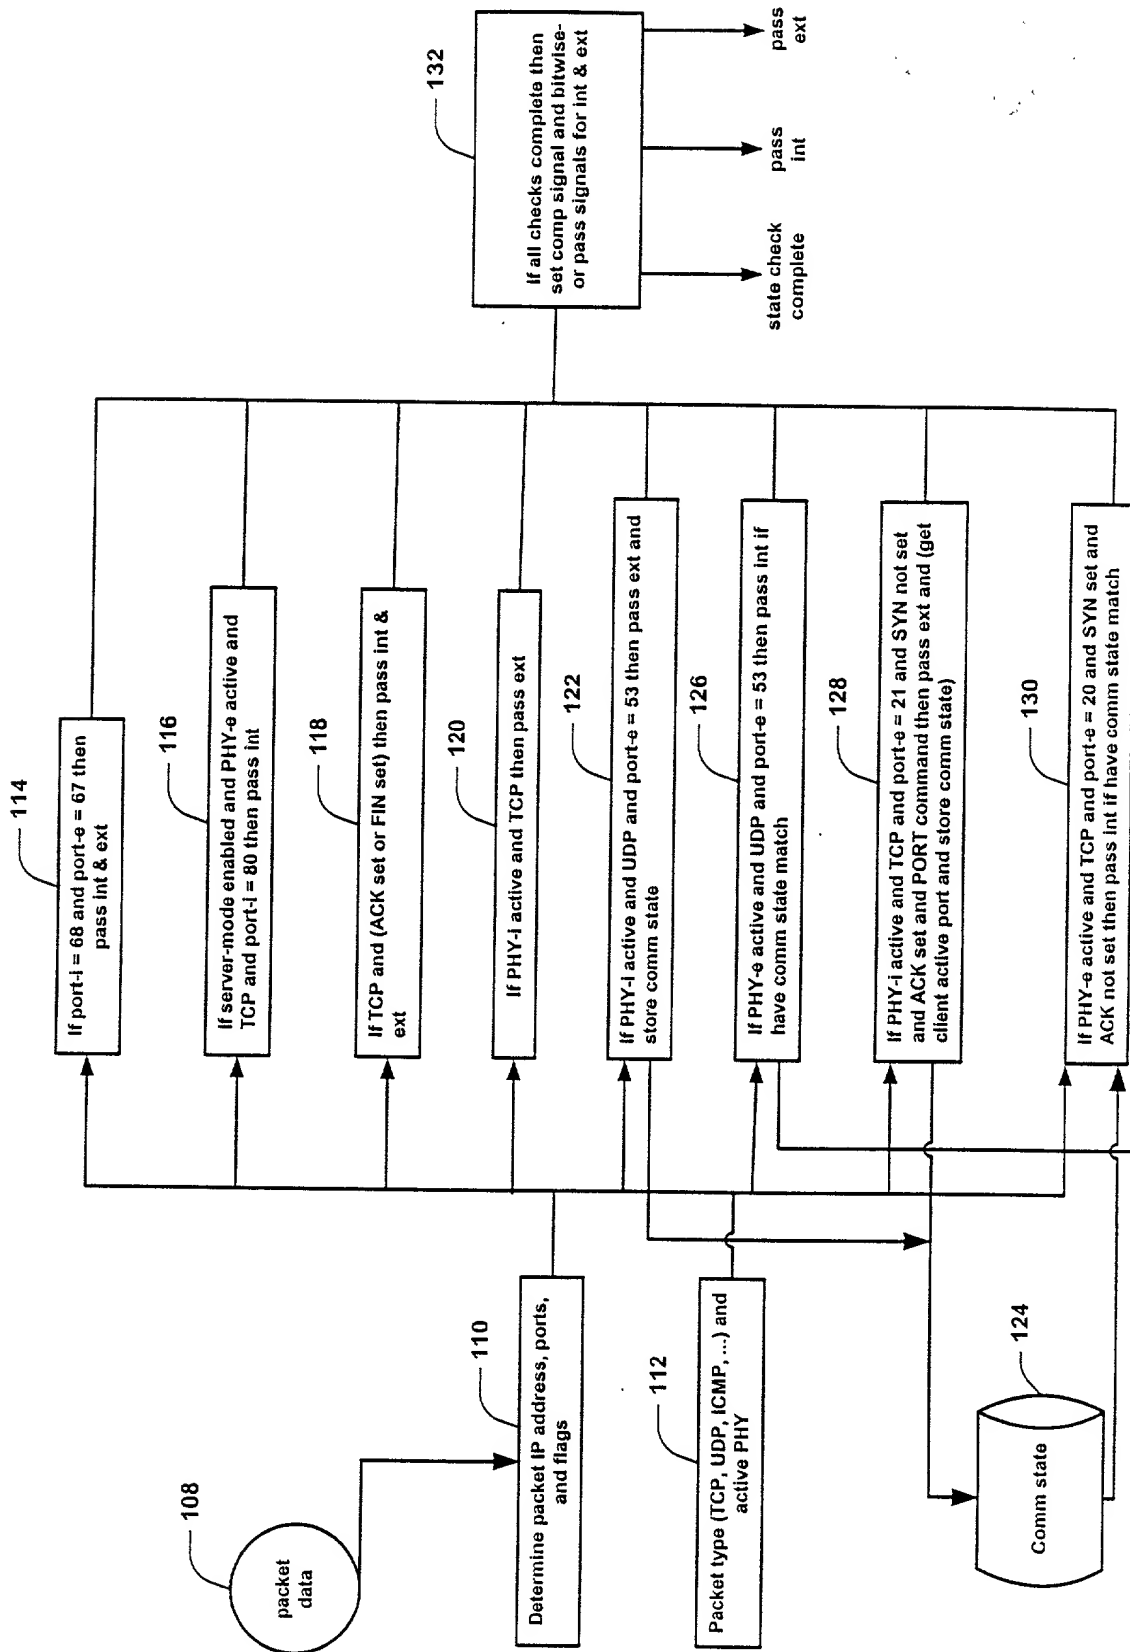FIG. 6



802-002  
8/24

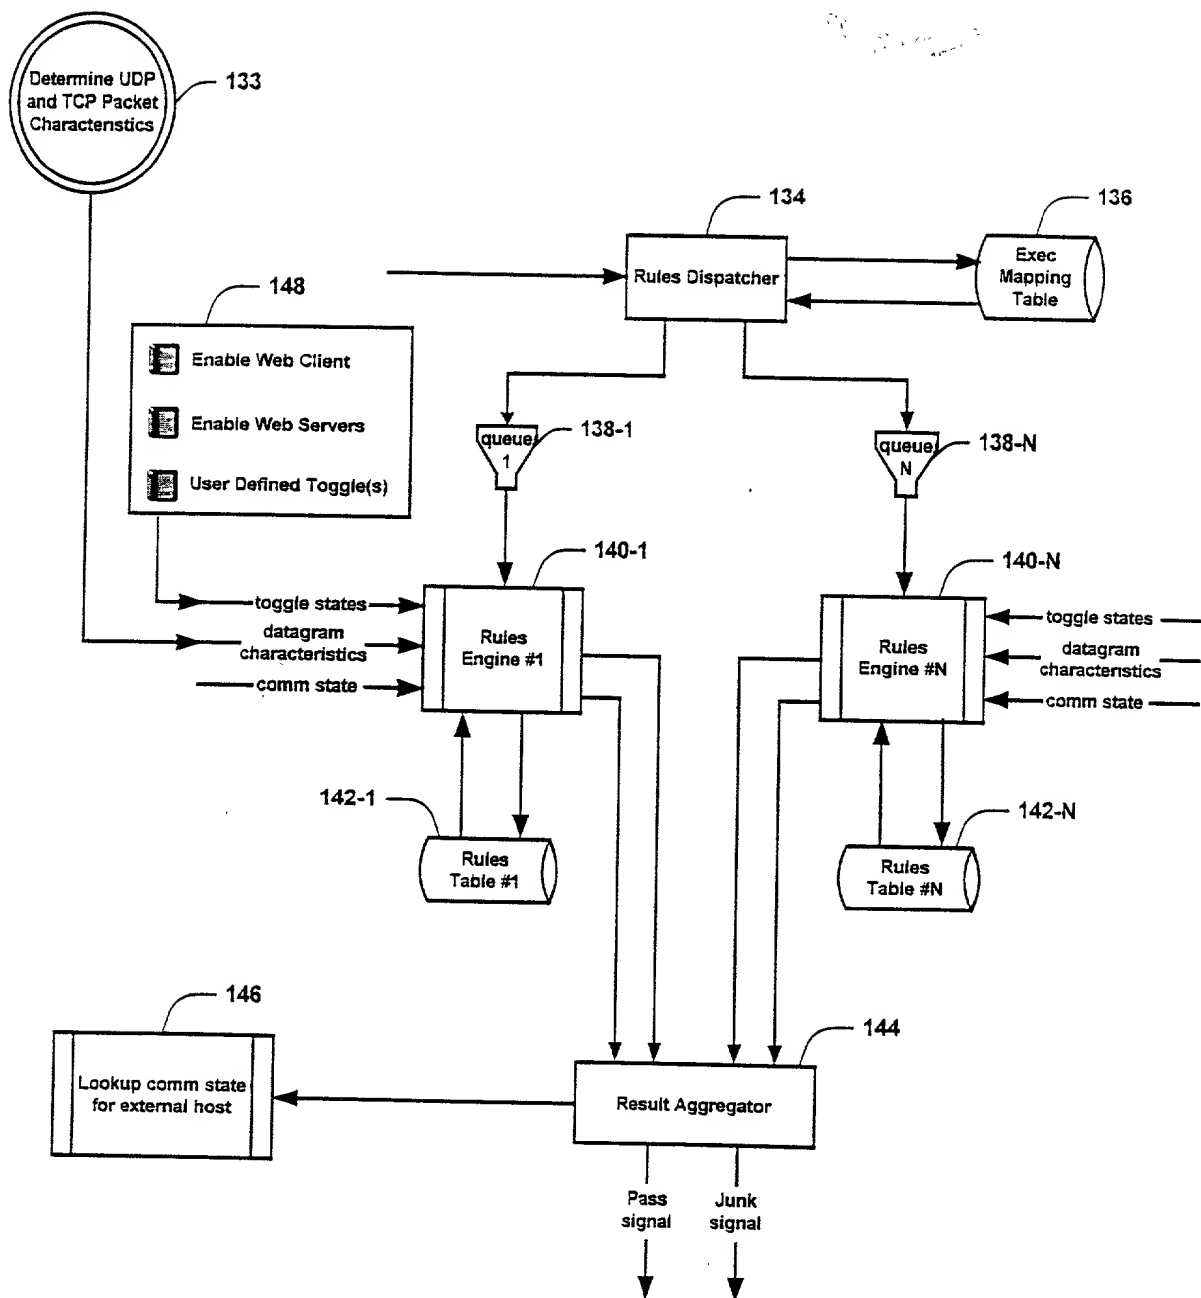FIG. 7






802-002

9/24

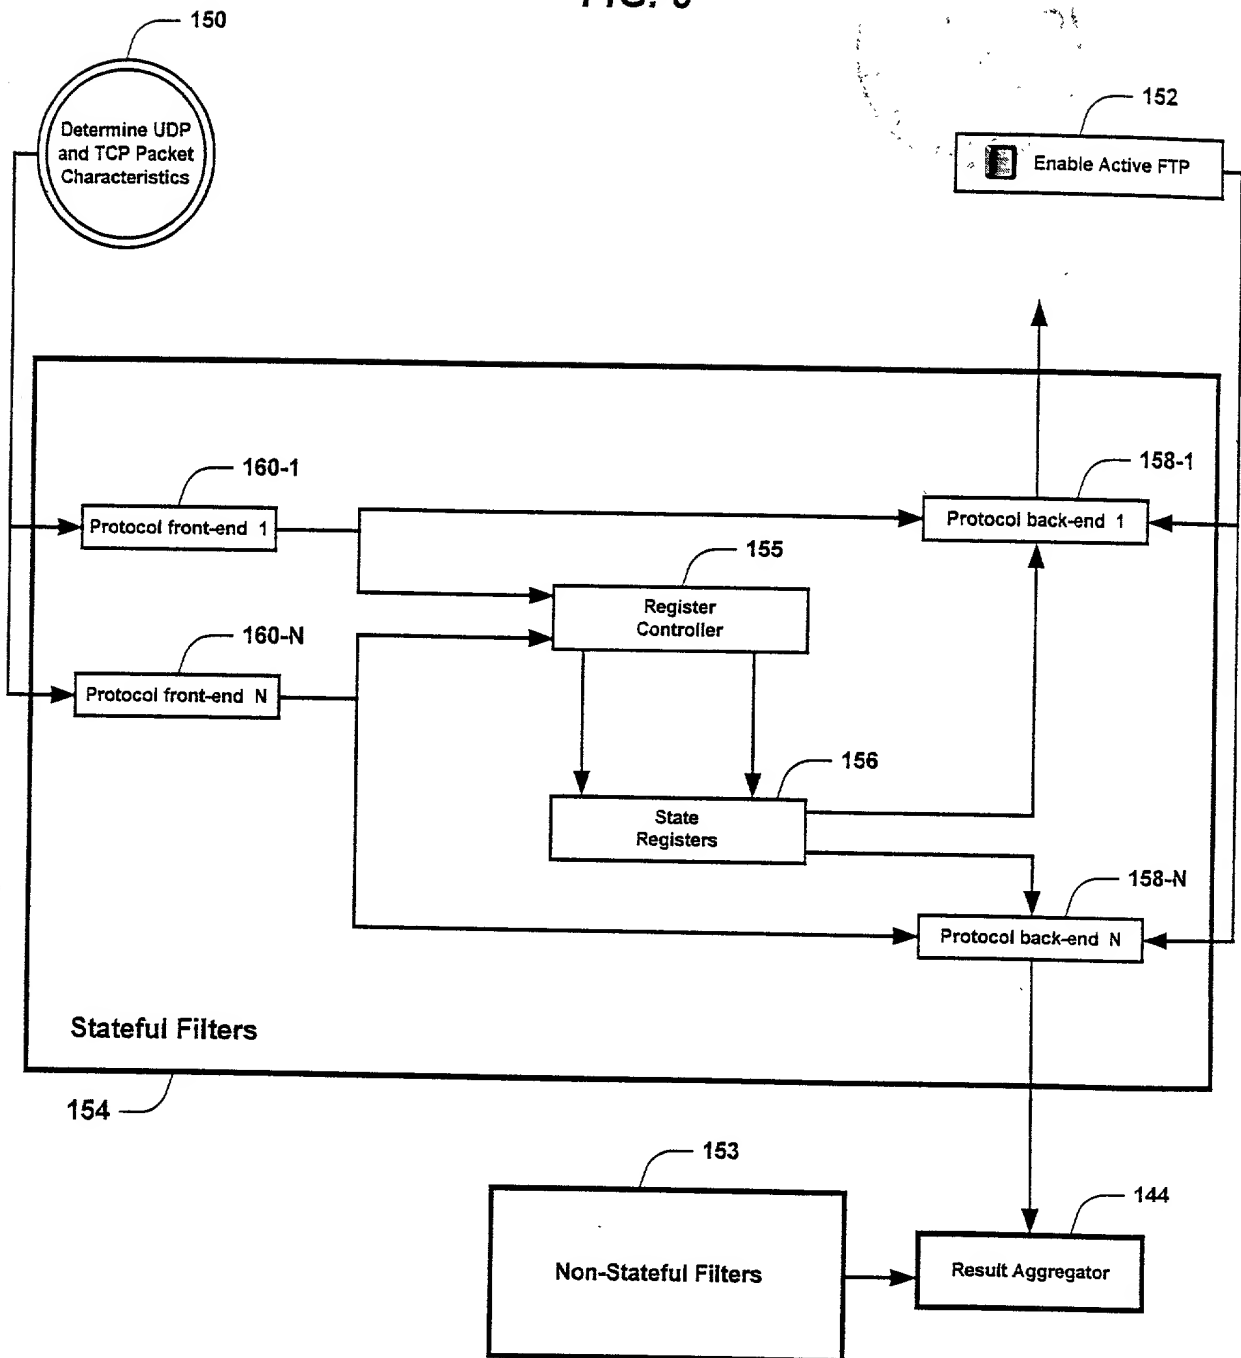
FIG. 8



802-002

10/24

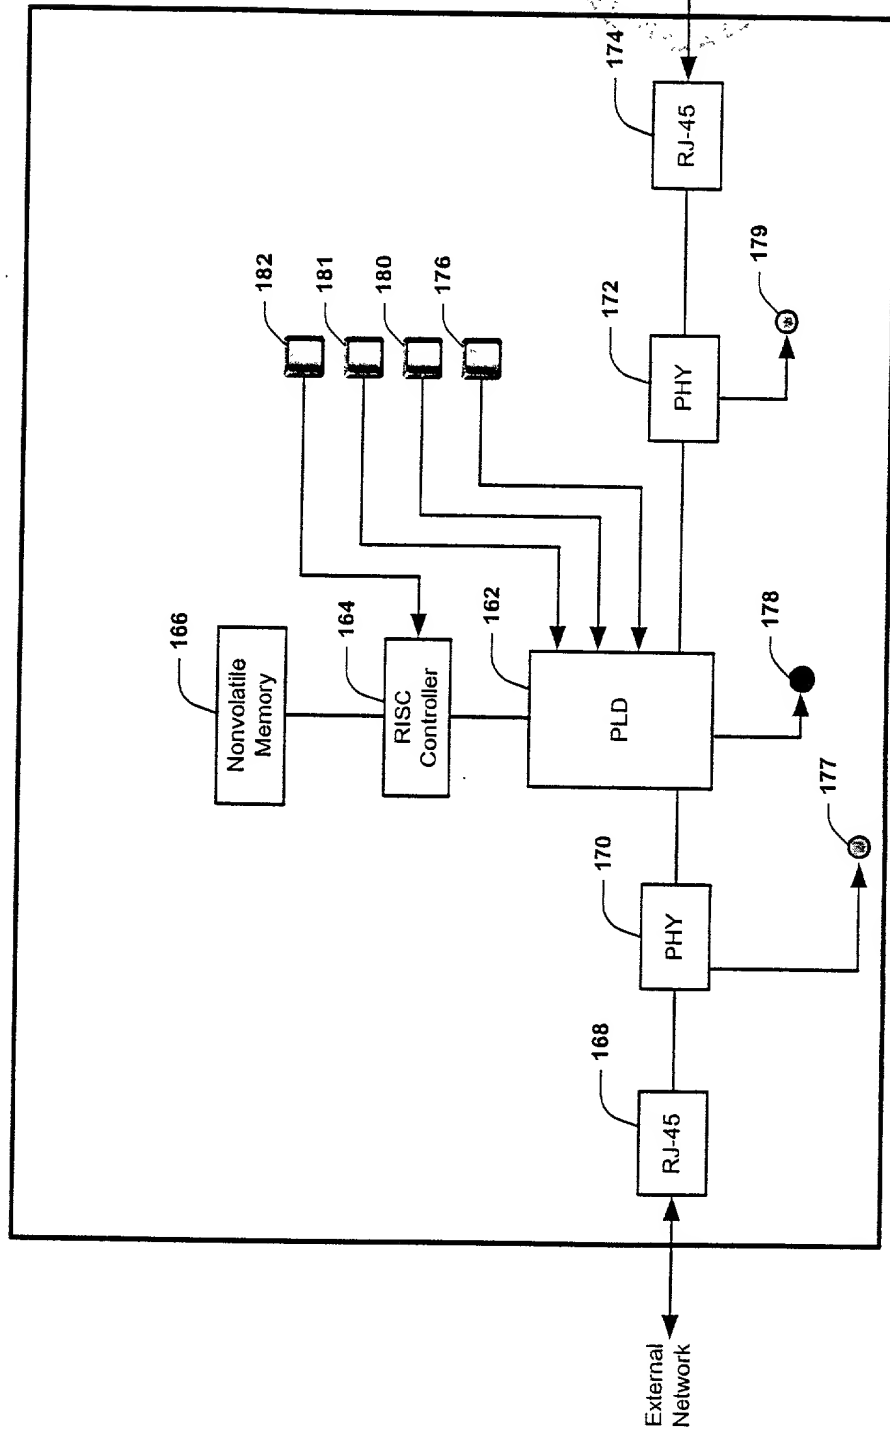
FIG. 9



802-002

11/24

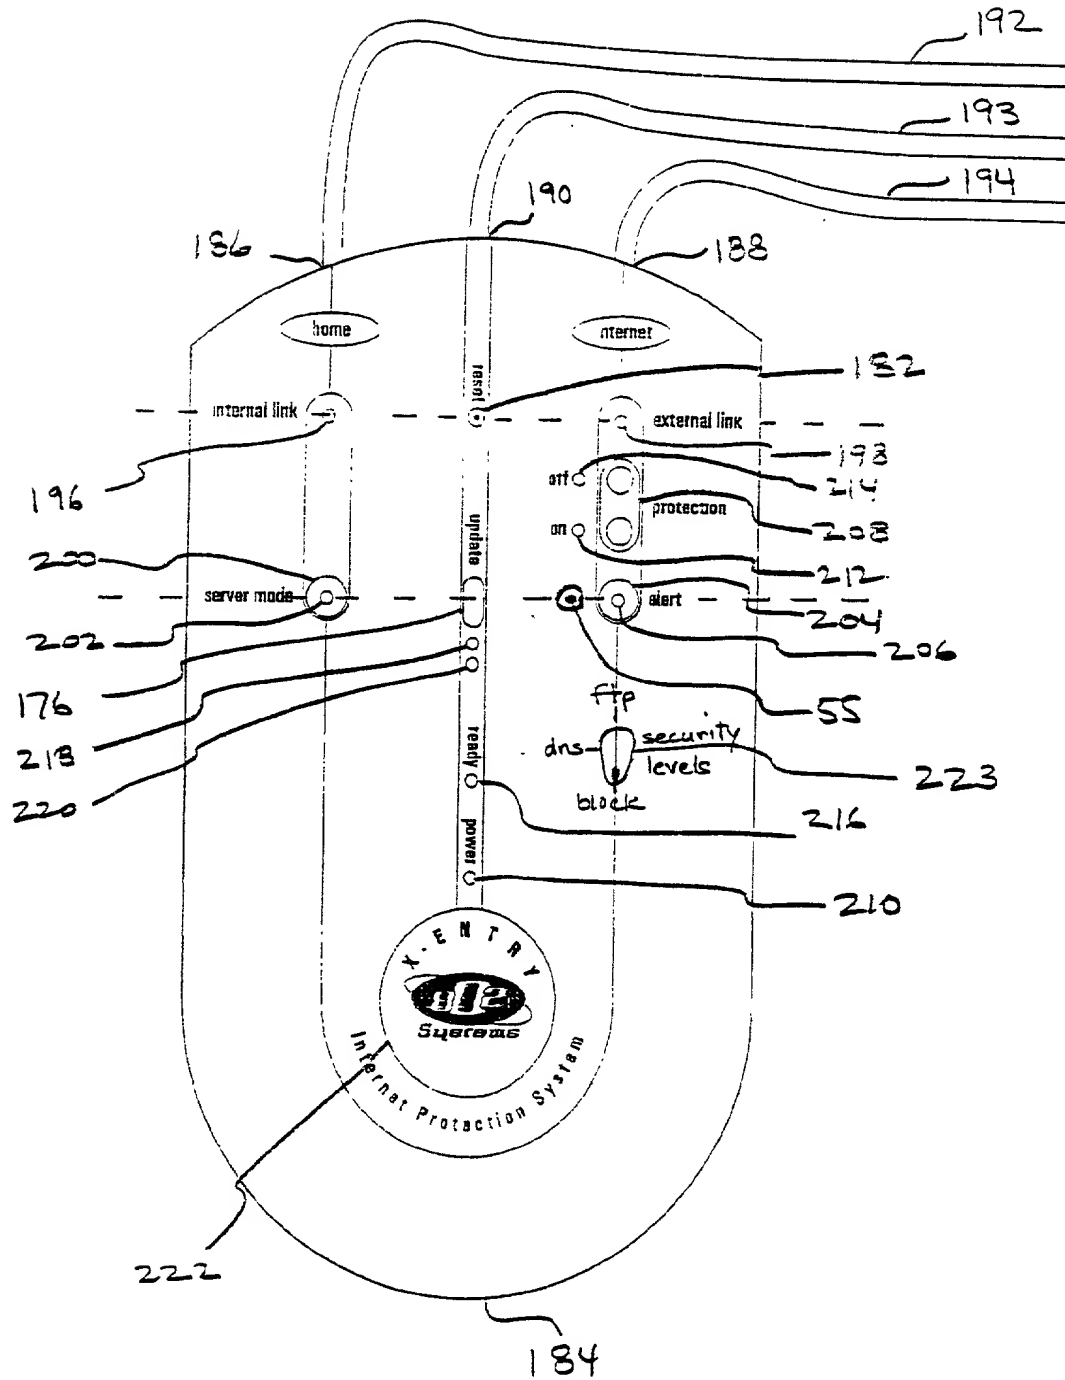FIG. 10'



802-002

12/24

FIG. 11

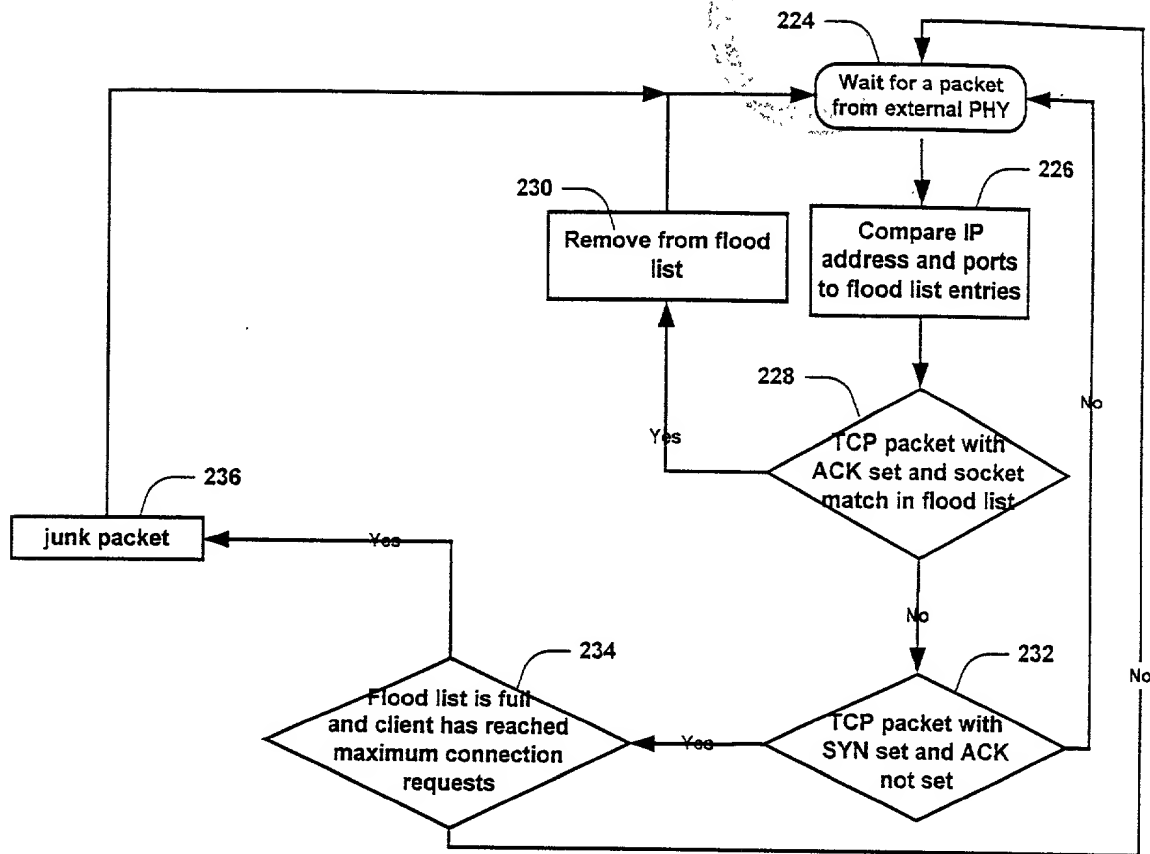


FIG. 12


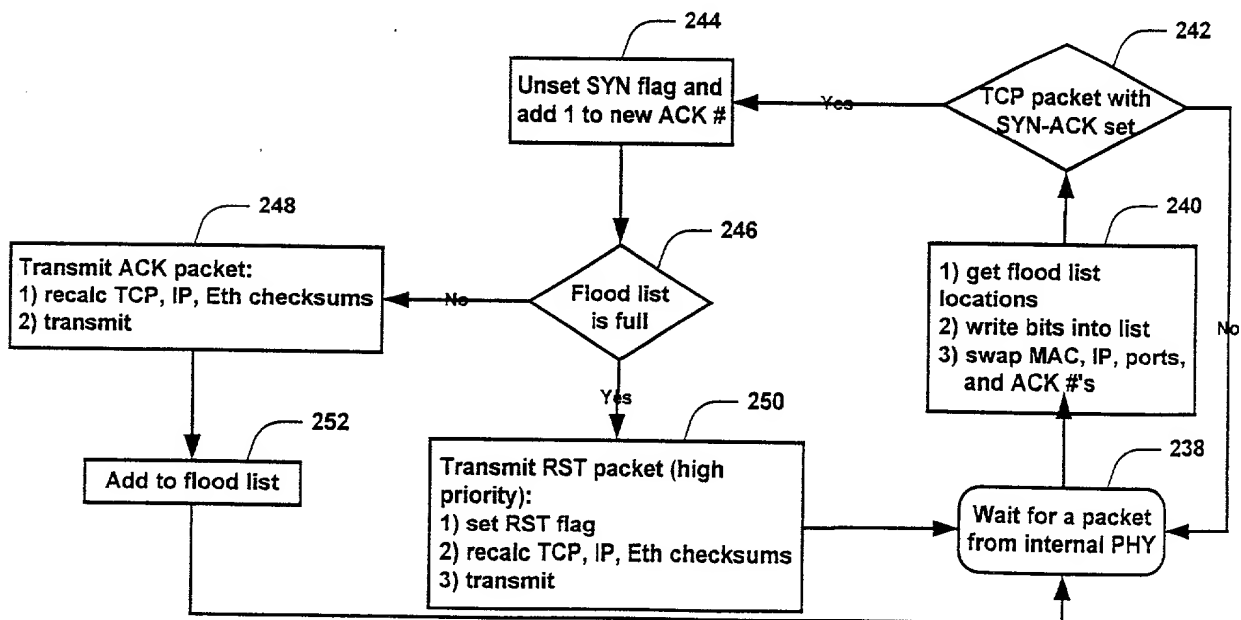



FIG. 13

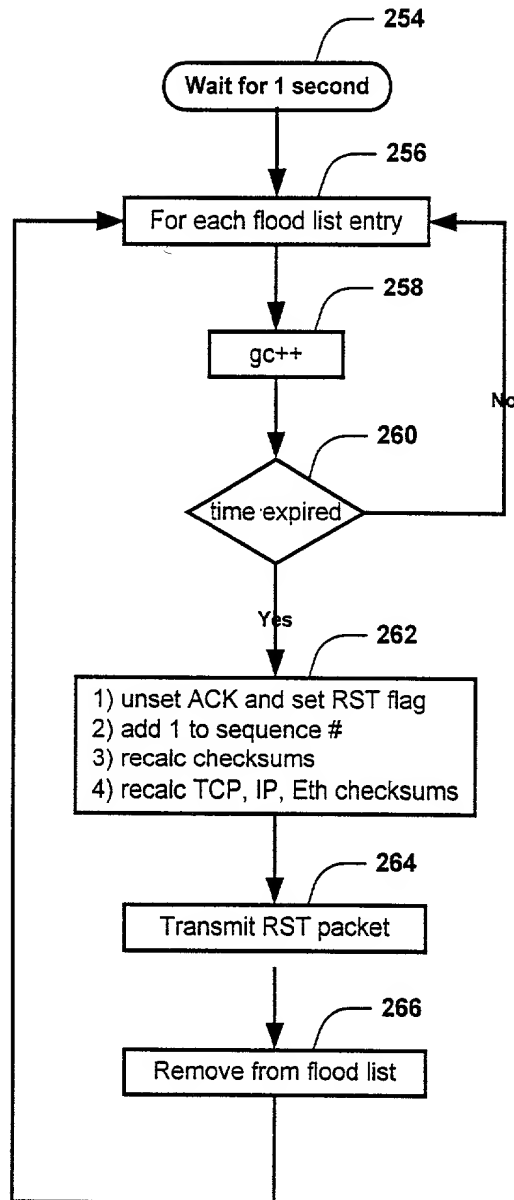

802-002  
14/24



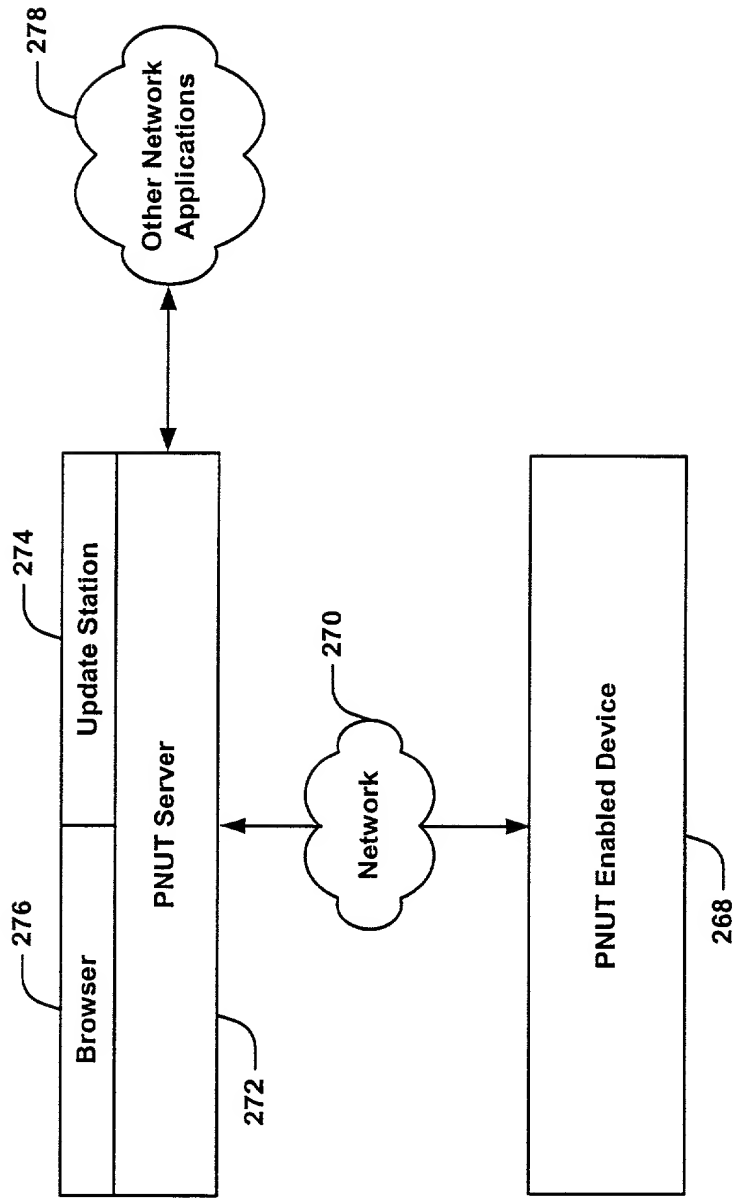FIG. 14



802-002

15/24

FIG. 15

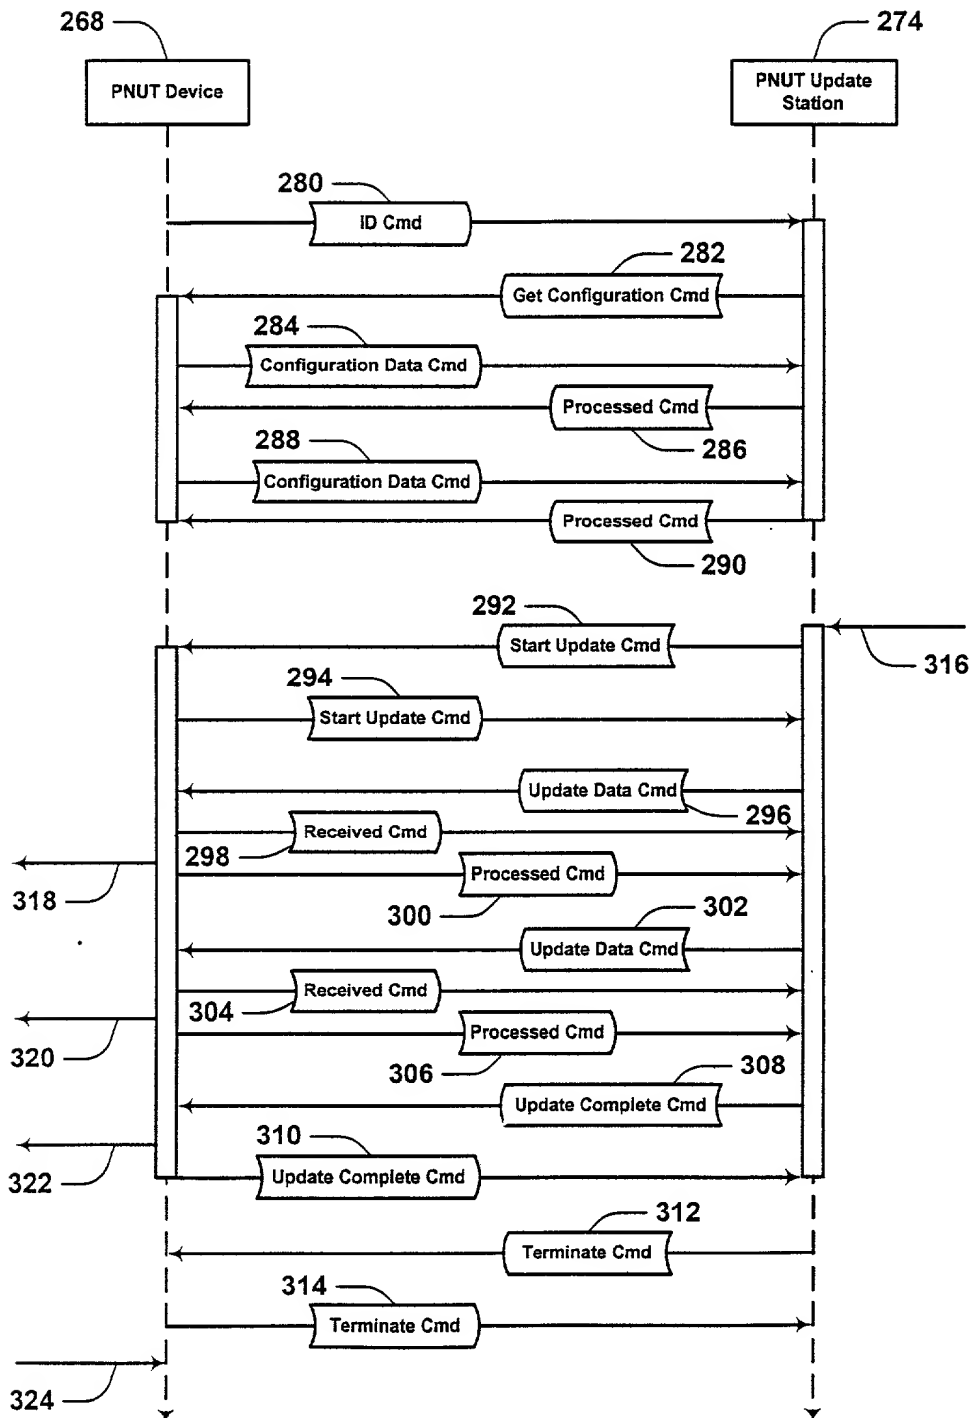


FIG. 16


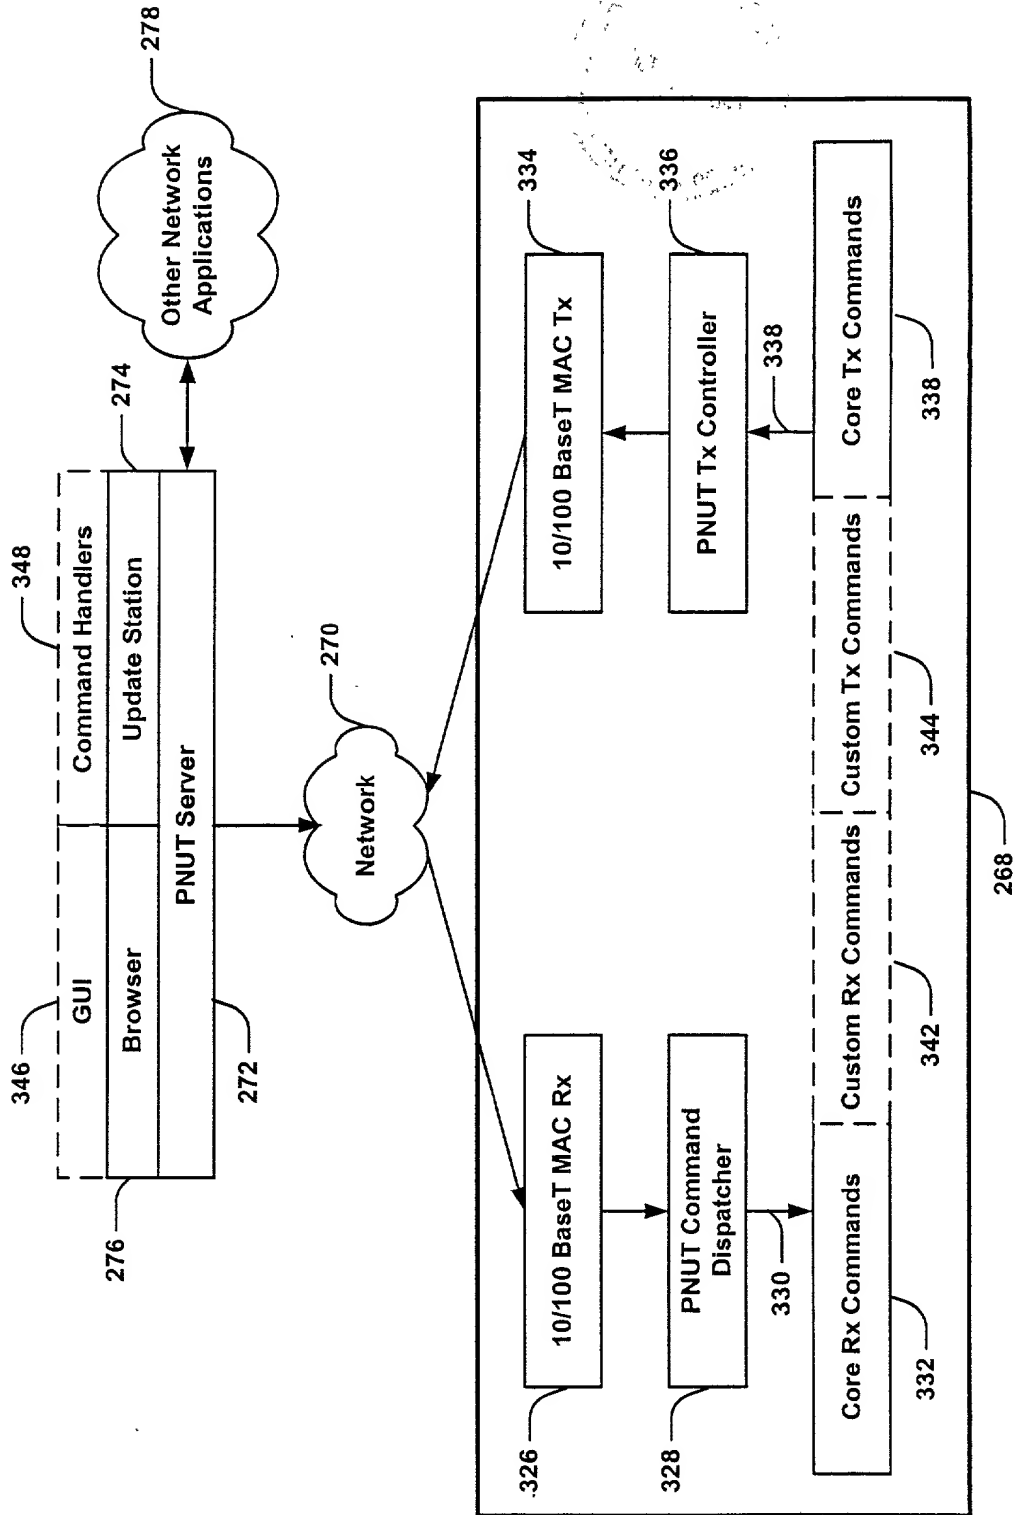




FIG. 17

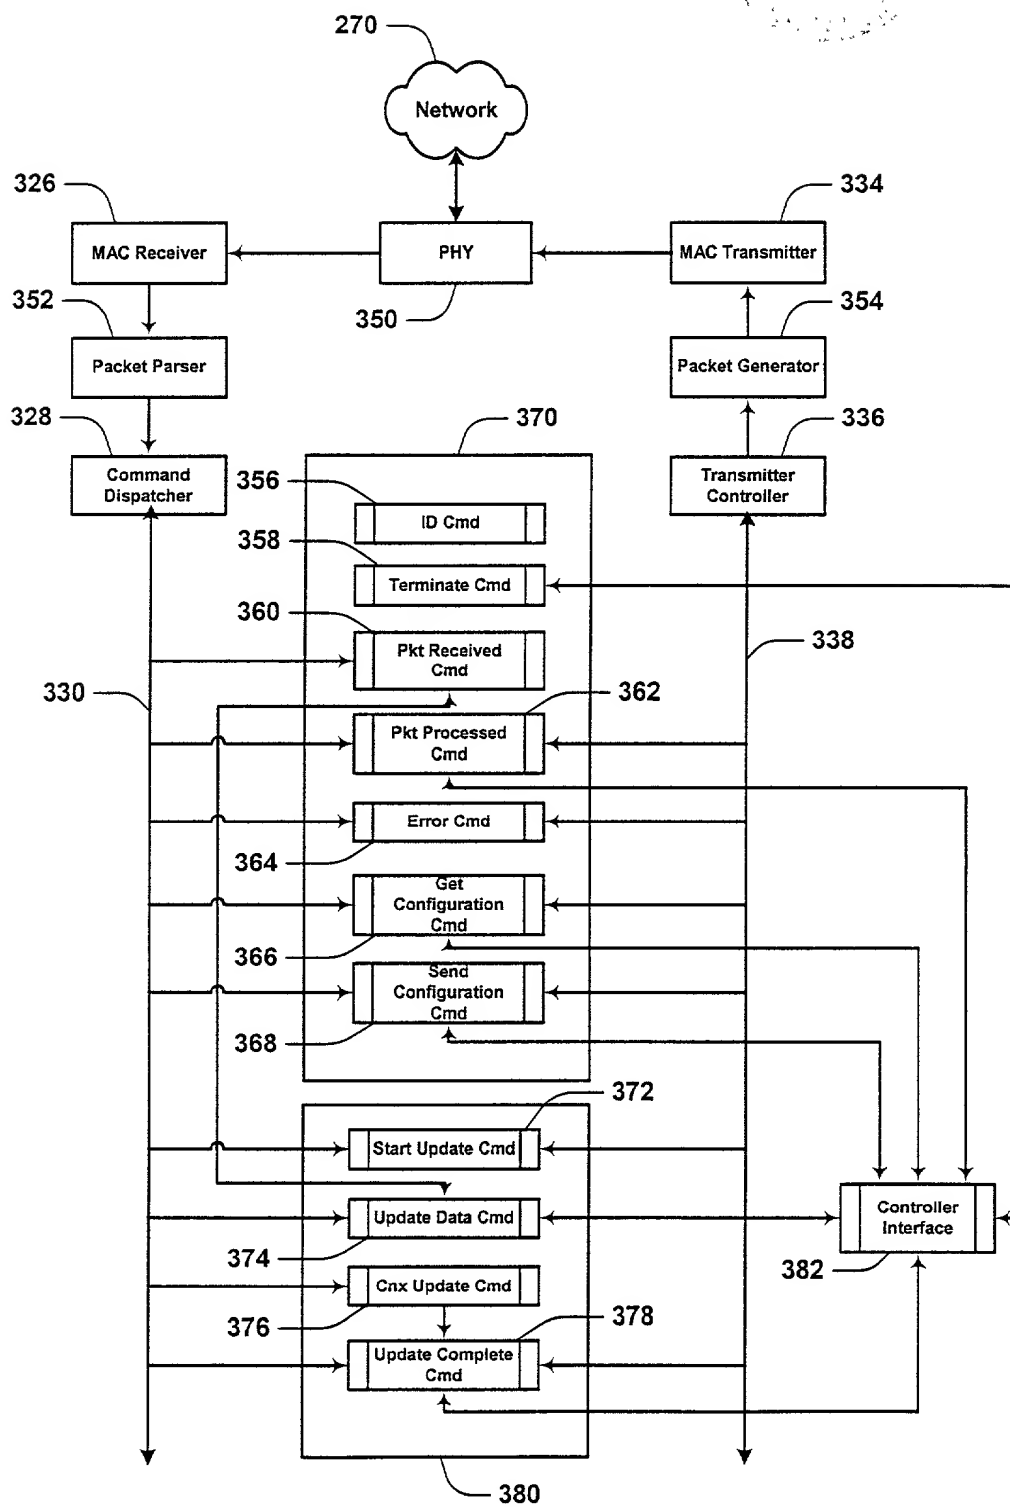

802-002  
18/24

FIG. 18

**X-Entry Setup - Netscape**


File Edit View Go Communicator Help

Back Forward Reload Home Search Netscape Print Security Stop

Bookmarks Location: file:///F:/firewall/xentry/PNUT/site/INDEX~1.HTM What's Related

Crusader CAM Administato

# X-Entry Setup



390 → 1 Choose X-Entry security options  
392 → 2 Generate X-Entry configuration  
393 391  
394 → 3 Place X-Entry into update mode  
4 Upgrade X-Entry using new configuration  
5 Have fun on the Internet } 396

**Special Client Services/Protocols**

- ☐ DHCP
- ☐ DNS
- ☐ FTP (active mode)
- ☐ Native support for streaming media
- ☐ IRC (Internet Relay Chat)
- ☐ NetBUEI
- ☐ IPX/SPX

**Servers Accessible from Internet**

- ☐ Web Server
- ☐ FTP (File Transfer Protocol)
- ☐ SSH (Secure Shell)
- ☐ Mail Server
- ☐ Telnet
- ☐ Games (Popular tiles)
- ☐ Gnutella (P-to-P File sharing)

**Additional Services**

- ☐ SYN Flood Protection
- ☐ Denial-of-Service Protection
- ☐ Spoof Protection
- ☐ Logging

Submit

Move forward to next document in history list

394 396

802-002  
19/24

FIG. 19


**X-Entry Setup - Netscape**

File Edit View Go Communicator Help

Back Forward Reload Home Search Netscape Print Security Stop

Bookmarks Location: /firewall/xentry/PNUT/site/upgrade.html?Submit=Submit What's Related

Crusader CAM Administrator



# X-Entry Setup

- 1 Choose X-Entry security options
- 2 Generate X-Entry configuration
- 3 Place X-Entry into update mode
- 4 Upgrade X-Entry using new configuration
- 5 Have fun on the Internet

398

384

386

400

Please press the 'Update' button on the X-Entry BPS.

402

Waiting for X-Entry

404

Waiting for user to press 'Update' button

Document Done

802-002

26/24

FIG. 20

**X-Entry Setup - Netscape**


File Edit View Go Communicator Help

Back Forward Reload Home Search Netscape Print Security Stop

Bookmarks Location: /firewall/xentry/PNUT/site/upgrade.html?Submit=Submit What's Related

Crusader CAM Administrator

# X-Entry Setup



- 1 Choose X-Entry security options
- 2 Generate X-Entry configuration
- 3 Place X-Entry into update mode
- 4 Upgrade X-Entry using new configuration
- 5 Have fun on the Internet

406

408

4107

2.0.D1.98.BF.18

34 % (Attempts = 1)

416 Update Cancel 418 414


412

Upgrading X-Entry box 2.0.D1.98.BF.18

Applet com\_802sys:ems.pnut.PnutUpgradeApplet

802-002  
21/24

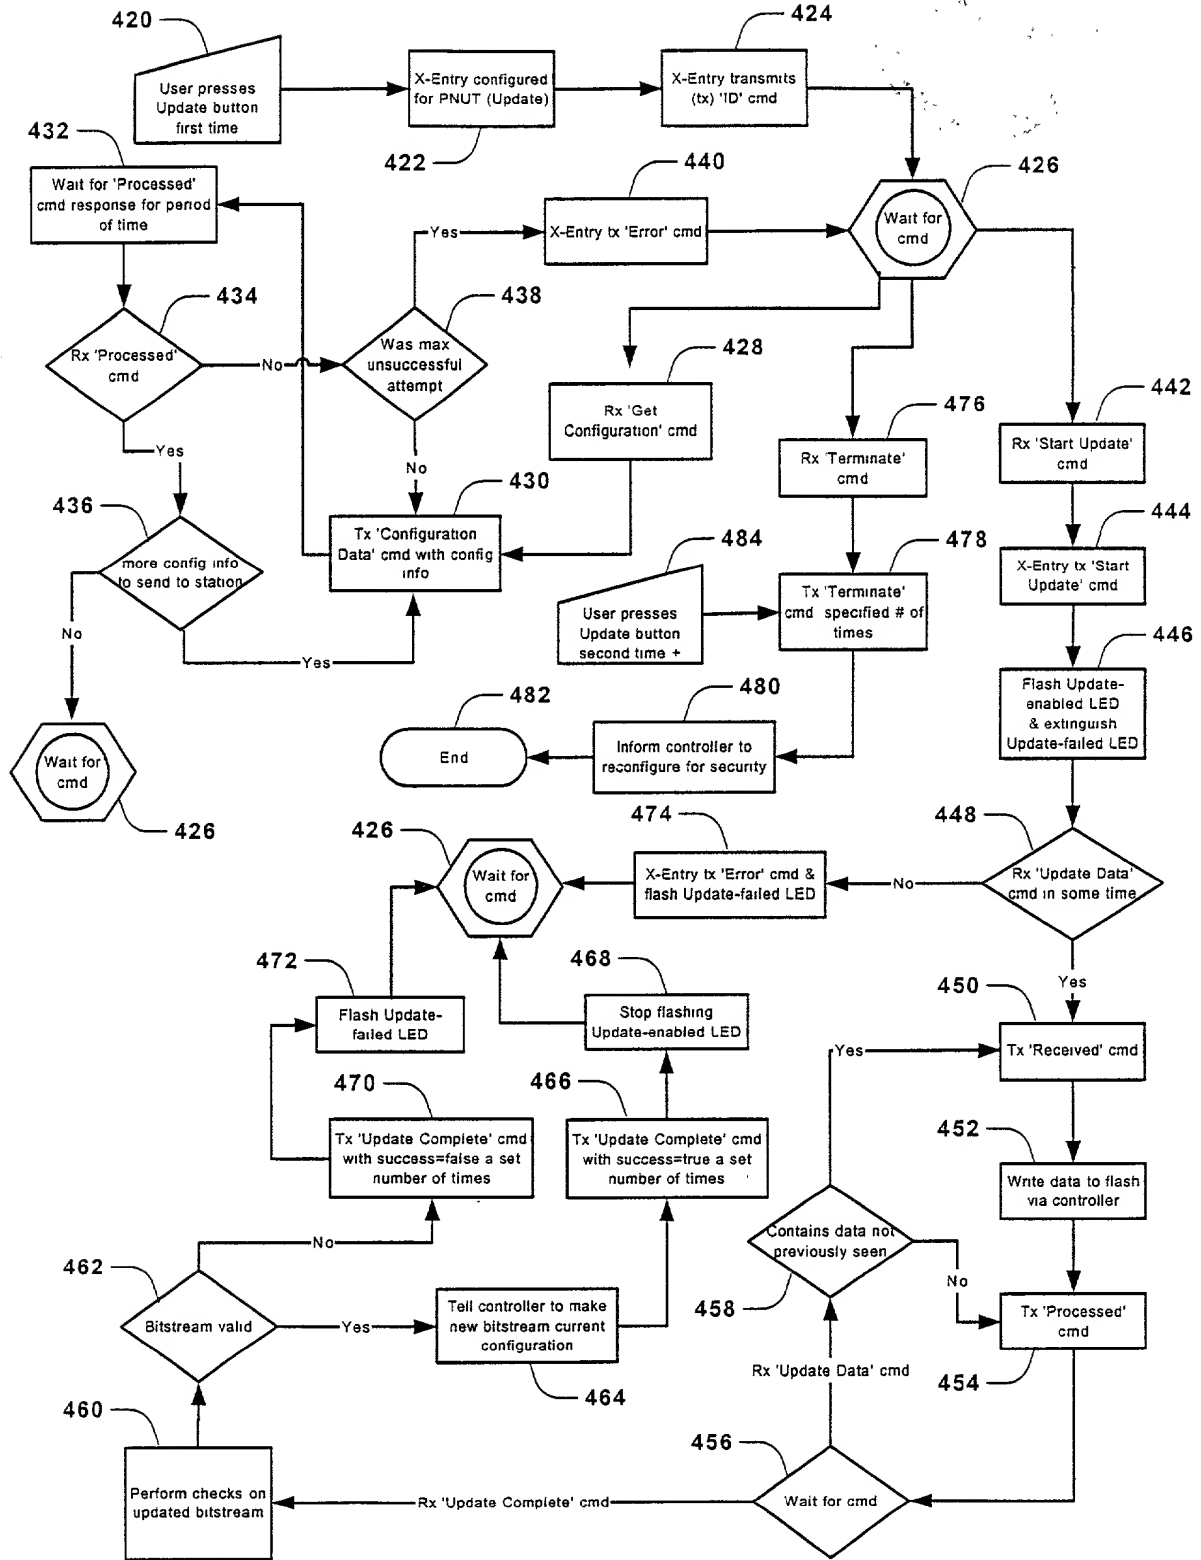FIG. 21



802/002  
22/24

FIG. 22

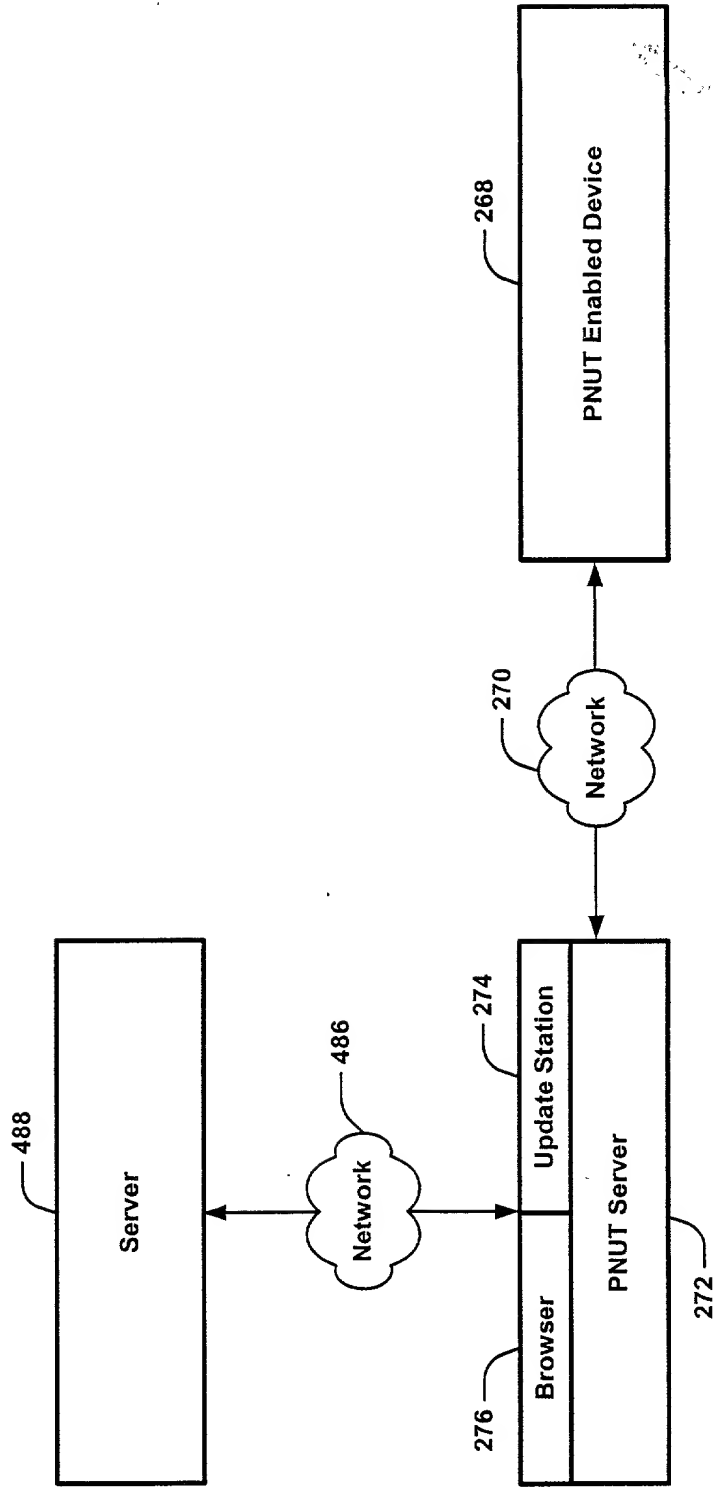


FIG. 23

```

<?xml version="1.0" encoding="UTF-8" ?>
- <formats>
494 - <msg id="128" name="UPDATE_START_CMD">
      <desc>Start Pnut update</desc>
      <byte name="type" transient="true" />
496   <bytes name="checksum" size="2" />
      </msg>
500 - <msg id="129" name="UPDATE_MSG_CMD">
      <desc>PNUT data update packet</desc>
      <bytes name="packet number" size="2" />
      <bytes name="length" size="2" transient="true" />
502   <bytes name="data" min_size="1" max_size="500" transient="true"
      max_print="0" />
      </msg>
      <msg id="130" name="UPDATE_LAST_MSG_CMD">
      <desc>Last Pnut update packet</desc>
      <bytes name="packet number" size="2" transient="true" />
512   <pad size="8" />
      </msg>
      <msg id="132" name="UPDATE_CNX_CMD">
      <desc>Cancel Pnut update</desc>
      <pad size="24" />
      </msg>
      <msg id="136" name="UPDATE_COMP_CMD">
      <desc>PNUT update complete</desc>
      <bytes name="status" size="1" transient="true">
514   <status success="0">
      <desc val="0">Successful</desc>
      <desc val="1">Bad packet checksum</desc>
518   <desc val="2">Flash write failure</desc>
      <desc val="3">Update cancelled</desc>
      </status>
      </bytes>
      <pad size="16" />
      </msg>
    </formats>

```

492

802-002  
24/24

FIG. 24

